

ASSA ABLOY

Pyropanel Roller Latch

DESCRIPTION

Fire rated roller latch suitable for Pyropanel fire rated doorsets.

APPLICATIONS




Approved for use in the following locations on most Pyropanel fire doors:

- the heads of pair leaf side-hung (hinged) doors,
- the lock stile of single leaf side hung (hinged) doors,
- the heads of pair leaf double-acting (pivot) doors,
- the lock stile of single leaf double-acting (pivot) doors.

(refer to techsheet ACC-09 for hardware and latching requirements for Pyropanel fire doors). The Roller Latch may also be used as a primary latch in conjunction with other locks/ latches which are approved only as a supplementary latch.

FEATURES

- Designed to securely hold the fire door leaf closed in the event of a fire, yet permitting door travel during non-fire conditions without turning a lever/knob.
- Pyropanel Roller Latch (DHLR) must be used with custom designed Pyropanel single-action striker (DHLRSS) for single-action doors, or double-action striker (DHLRDB) for double-action doors (products are supplied separately).
- Fire rated up to 2 hrs on Pyropanel fire doors.
- Manufactured in Australia.

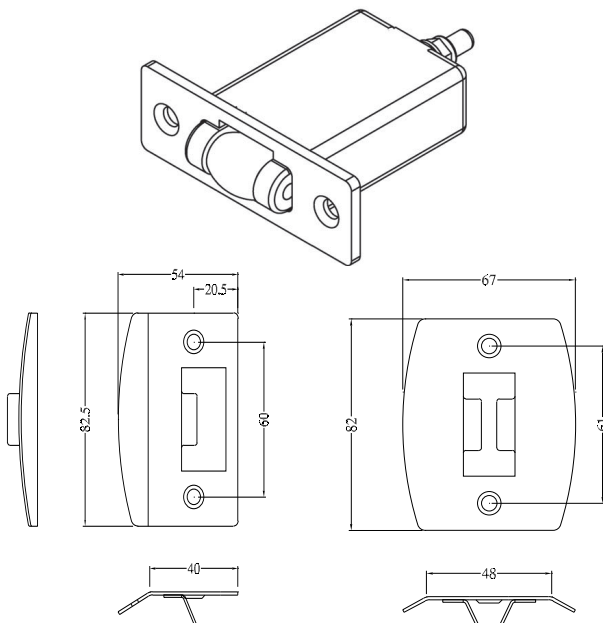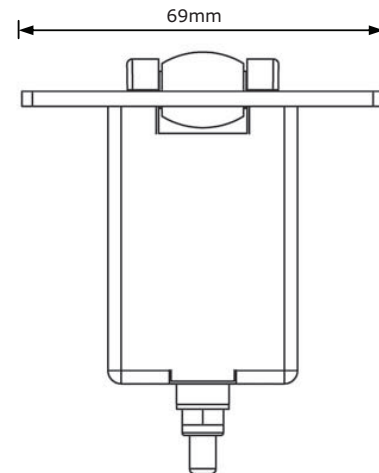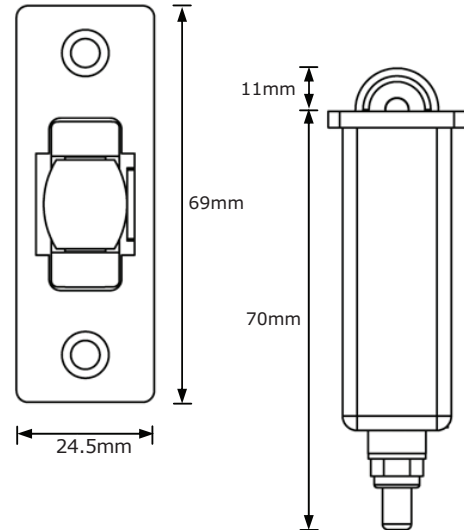

Single Striker: DHLRSS

Double Striker: DHLRDB

HOW TO SPECIFY

"Pyropanel Fire Rated Doorset to include Pyropanel fire rated Roller Latch and Single/Double* action Striker".

* Single for Side-hung (hinged) doors. Double for double-action (pivot) doors.

Product Codes:

Roller Latch:	DHLR
Single Striker:	DHLRSS
Double Striker:	DHLRDB

Distributed by:

ASSA ABLOY Australia Pty Ltd
235 Huntingdale Rd, Oakleigh, Vic 3166
Ph: **(03) 9837 8500**
Email: **sales@pyropanel.com.au**
Web: **www.pyropanel.com.au**

ASSA ABLOY Australia P/L has a policy of continuous improvement and reserves the right to change methods and specifications without notice.
Note: The Tech Sheet is an uncontrolled document. If printed, please refer to the Tech-Sheet on the website to check if this document is valid.