SURECLOSE® READYFIT

Hydraulic Gate Hinge-Closers. Externally Mounted.











A Hinge and/or Closer in one small, powerful package

- Ideal for Commercial/Industrial applications
- Powerful, hidden hydraulics that won't leak!
- Quick & easy to install – externally mounted (screw- or weld-on)
- Self-close gates up to 120kg
- Two rows of bearings provide superior performance
- Now with Torx screws for extra tamper resistance
- Adjustable self-closing speed (some models)
- Final snap-close action (some models)
- Heavy duty, 50-micron anodised aluminium

D&D Technologies

World's most trusted gate hardware

SURECLOSE® READYFIT







SCREW ON – ALUMINIUM AND STEEL GATES		
RF SM S Code: 74001313T	**RF 108 S Code: 74108313T**	**RF 108SF S* Code: 74108323T**
Load Bearing Hinge	Hinge/Closer	Hinge/Closer + Safety Feature
Non self-closing	Self-closing from 83° with final Snap Close	Self-closing from 88° with final Snap Close
Max gate opening 178˚ one way	Max gate opening 178˚ one way	Max gate opening 88˚ one way
–	Holds gate open at 90˚–180°	No hold-open feature
–	Not suitable for pool/safety gates	Suitable for pool/safety gates

WELD ON – STEEL GATES		
RF SM W Code: 74001315T	**RF 108 W Code: 74108315T**	**RF 108SF W* Code: 74108325T**
Load Bearing Hinge	Hinge/Closer	Hinge/Closer + Safety Feature
Non self-closing	Self-closing from 83° with final Snap Close	Self-closing from 83° with final Snap Close
Max gate opening 178˚ one way	Max gate opening 178˚ one way	Max gate opening 88˚ one way
–	Holds gate open at 90˚–180˚	No hold-open feature
–	Not suitable for pool/safety gates	Suitable for pool/safety gates

Note: Minimum fence post size 50mm. Gap variance for all models 12-35mm. Range sold as single hinges.


READYFIT SM





Hinge Combinations	Max Self-Closing Gate Weight*
108 + SM	80kg
108 + 108	120kg
Access Control	**Weight Capacity**
SM + SM	680kg


***CAUTION:**
Based on max gate size 1800x1000mm. For gates with greater HxW, or if weather conditions such as wind play a significant role, use hinge combinations with higher self-closing weight ratings.


READYFIT 108



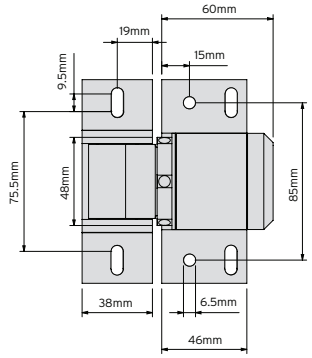








ReadyFit Brackets

Models	Bracket Material
74108315	Steel
74108313	Aluminum

SELF-CLOSING - NON SAFETY
Not suitable for child/pool safety

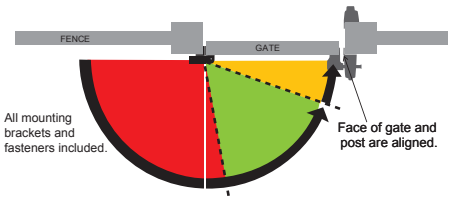


CAUTION:
Models with "SF" in their codes indicate a **self-closing hinge,** with no hold-open capabilities. Because SF hinges do not open more than 90°, the gate must carry a gate-stop that prevents the gate opening more than 90˚. Forcing a gate with SF hinges beyond a 90° opening will damage the hinges and void Warranty.
If using SF hinges on child safety gates always consult the appropriate authorities in your area to meet local requirements or code compliance.

ReadyFit Brackets

Models	Bracket Material
74108325	Steel
74108323	Aluminum

SELF-CLOSING - SAFETY (SF Model)
Suitable for child/pool safety*
DO NOT PROP GATE OPEN

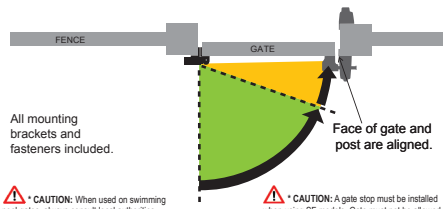

* **CAUTION:** When used on swimming pool gates, always consult local authorities for swimming pool Codes.

* **CAUTION:** A gate stop must be installed when using SF models. Gate must not be allowed to open past 90˚. Doing so voids warranty.

www.ddtechglobal.com
Unit 6, 4-6 Aquatic Drive, Frenchs Forest NSW 2086
Tel: (02) 9454 7888 Email: sales@ddtech.com.au

D&D Technologies
World's most trusted gate hardware

PROMO169 15/1/19