
SOLTAIRE 120 TELESCOPIC



APPLICATION

- · All doors connected to universal telescopic systems will traverse simultaneously
- The door leaves are linked together via toothed belt and pulley system
- The Soltaire telescopic HTEL120/2 & HTEL120/3 allow 2 & 3 door leaves to be concealed on the same side of the opening, maximising the opening and reducing the wall space required
- The HTEL120/4SIM 4 door system allows 2 doors to open to both sides of the opening, allowing for open plan living
- · The telescopic system is non-handed
- The system incorporates a coveted ghost guide which keeps the walkway clear and free from trip hazards



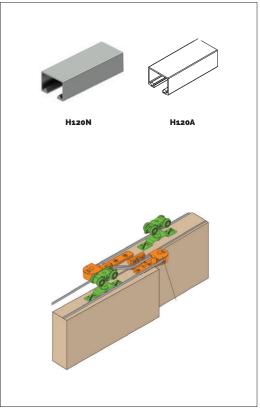

HARDWARE SPECIFICATION			
HTEL120/2 2 Door Kit (contains)		HTEL120/3 3 Door kit (contains)	
4 x Hangers (H51/120/SS)		6 x Hangers (H51/120/SS)	
2 x Track Stop (HH4/SS)		2 x Track Stop (HH4/SS)	
1 x Short bearing		2 x Short bearing	
1 x Door mounted belt fixing bracket		2 x Door mounted belt fixing bracket	
1 x Length of toothed belt		2 x Length of toothed belt	
1 x Following door guide		2 x Following door guide	
1 x Fixed base floor guide		1 x Fixed base floor guide	
1 x Long bearing wheel assembly		2 x Long bearing wheel assembly	
1 x Wall mounted belt fixing		1 x Wall mounted belt fixing	
HTEL120/4SIM 4 D	oor Kit (contains)		
8 x Hangers (H51/120/SS)			
2 x Track Stop (HH4.	/SS)		
2 x Short bearing			
4 x Door mounted belt fixing bracket			
1 x Length of toothed belt			
2 x Following door g	guide		
2 x Fixed base floor	guide		
2 x Long bearing wh	neel assembly		
2 x Wall mounted be	elt fixing		
Required extras			
H120N	Track no brush, Anodised Aluminium (2, 3, 4, 6mtr lengths)		
H120A	Track for brush strip anodised Aluminium (2, 3, 4, 6mtr lengths) Soffit fix spacing 600mm centres (maximum)		

DOOR SPECIFICATION		
Track System	Soltaire Telescopic	
Max Door Weight	120kg	
Min Door Width	500mm	
Max Door Width	1200mm	
Door Thickness	32-47mm	

www.assaabloy.com/nz

HENDERSON

SOLTAIR 120 TELESCOPIC

DRAWING IS NOT TO SCALE

