

IMPERIAL 200


HENDERSON

For bottom roller sliding residential doors. Max 200kg each.

APPLICATION

- For timber sliding doors, interior and exterior applications
- Designed for straight sliding partitions or fully glazed patio doors and flushed panel doors
- Suited for where the supporting structure or lintel is insufficient for the weight of the door or where headroom is limited
- To cover the width of opening, any number of doors can be used on single or multiple lines or rail, doors can slide to one or both sides
- Where fitted externally, a canopy is recommended to protect the top guide channel, brackets and top guide rollers

HARDWARE SPECIFICATION		
Top Guide Tee	H906TA	Light Duty - Aluminium
Top Guide Channel	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94X/A	Anodised aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94P	Polypropylene (2000, 3000, 4000 & 6000mm lengths)
	H94PSC	Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths)
	H900AN	Anodised aluminium (2000, 3000, 4000 & 6000mm lengths)
Brackets	H1/SS	For single line - face fixed stainless steel
	H5H/SS	For double line - face fixed stainless steel Fix at 900mm centres (max.)
Top Guide Rollers (2 per door)	H106HSS/94	Timber doors - concealed fixing with SS bearing
	H113SS/94	Corner fitting - stainless steel with stainless steel bearings
	H261SS/900	Top plate fitting for 900 channels - stainless steel with anti-rattle double nylon rollers
Bottom Rollers (2 per door)	H200SS	Stainless steel with precision stainless steel ball bearing wheels with side access adjustment (black and white plug included)
	H150N	Stainless steel with precision SS bearings Nylon wheels (max door weight 150kg)
Bottom Rail	H915B	Brass (2000, 3000, 4000 & 6000mm lengths)
	H915X	Anodised Aluminium (2000, 3000 & 4000 lengths)
	H918	Brass (1500 & 3000mm lengths) Drilled and countersunk
Accessories		
Interlocking Seal	H59BZ/4800	Bronze anodised (4800mm to suit typical 2400mm door height)
	H59CA/4800	Clear anodised aluminium (4800mm to suit typical 2400mm door height)
Frame Seal	HAQ21	
Door Stop	HH2/SS	In channel door stop to suit 900 channel
	LA250C	Floor mounted door stop

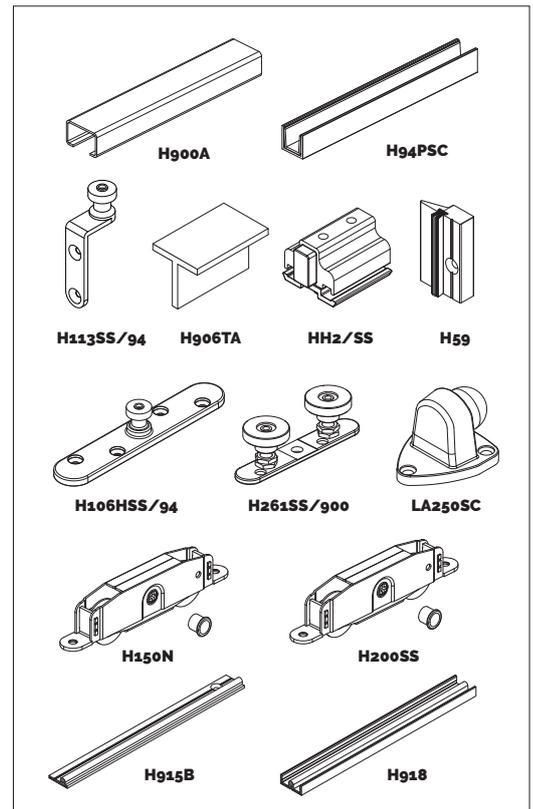

DOOR SPECIFICATION

Track System	Imperial 200
For Individual Doors:	
Max Door Weight	150kg (H150N) - 200kg (H200SS)
Min Door Thickness	40mm
Max Door Height	3000mm
Doors can be constructed with bottom rails of at least 150mm depth to accommodate the concealed, mortised bottom rollers. Door weight is carried on the floor permitting the use of a light overhead structure.	



IMPERIAL 200

**DRAWING IS
NOT TO SCALE**

