

SECUREFOLD PRO 100 (NON-MORTICE)


HENDERSON

For top hung exterior folding timber and aluminium doors. Max 100kg each leaf.

APPLICATION

- Manufactured from high grade 316 stainless steel and cutting edge polymers with anodised aluminium track
- Ideal for coastal environments or areas requiring a high level of corrosion resistance
- Designed for external outward opening timber and aluminium doors up to 100kg
- Ideal for residential or commercial applications
- Fantastic resistance to the weather.
- System can be customised to suit various applications

HARDWARE SPECIFICATION		
Track	H250	Anodised Aluminium (2000, 3000, 4000 & 6000mm lengths)
		Soffit fix spacing 900mm centres (maximum)
Hangers	HSFP2S	End hanger set check in - Reversible handing (incl. hanger, guide and hinge)
	HSFWP2S	End hanger set non-mortice wrap around - Reversible handing (incl. hanger and guide)
	HSF4S	Intermediate hanger set (includes hanger, guide and hinge)
	HSFP8S	Meeting door set - rebated (incl. 2 hangers and 2 guides)
	HSFWP8S	Non-mortice meeting door set - non-mortice for square cut doors (includes 2 hangers and 2 guides)
Pivot Sets	HSFP1S	Pivot set check in (incl. top and bottom pivots)
	HSFWP1S	Pivot set non-mortice wrap around (incl. top and bottom pivots)
	HSF9S	Intermediate pivot hinge check in (optional for doors over 2200mm high)
	HSFW9S	Intermediate pivot hinge non-mortice wrap around (optional for doors over 2200mm high)
Hinge Sets	HSF3S	Hinge handle set (incl. 2 hinges and 1 hinge handle)
	HSF5S	Hinge set - inward opening (incl. 3 hinges)
	HSF6S	Offset hinge set - inward opening (incl. 3 offset hinges)
	HSF7S	Offset hinge handle set - outward opening (incl. 2 offset hinges and 1 offset hinge handle)
Channels	H89SS	Stainless steel (2000 & 3000mm length)
	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94P	Polypropylene (2000, 3000, 4000 & 6000mm lengths)
	H94PSC	Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths)
Accessories		
Flushbolts	HSF190S	190mm non locking flushbolt
	HSF190LS	190mm locking flushbolt
	HSF450S	450mm non locking flushbolt
	HSF450LS	450mm locking flushbolt
	HSF600S	600mm non locking flushbolt
	HSF600LS	600mm locking flushbolt

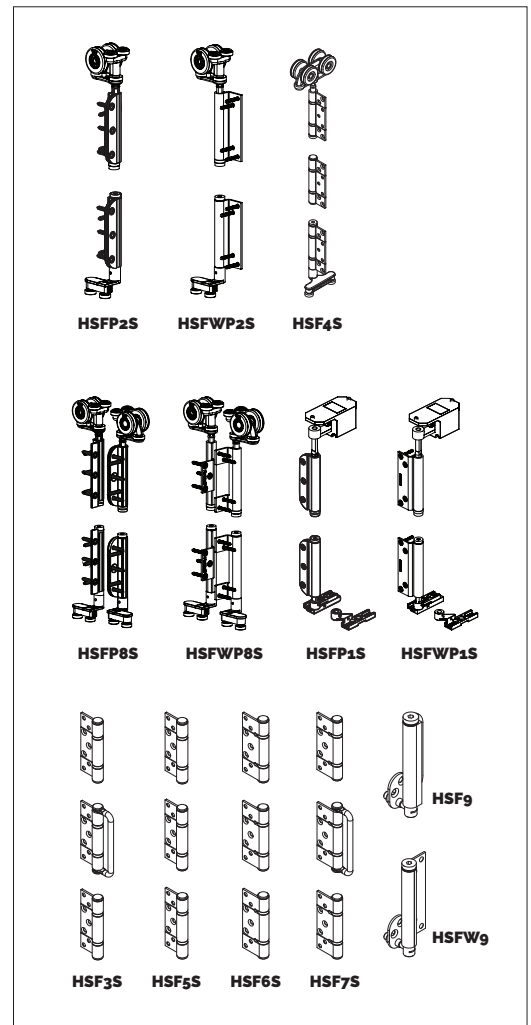

DOOR SPECIFICATION	
Track System	Securefold 100
For Individual Door Leaves:	
Max Panel Weight	100kg
Max Panel Width	1000mm
Panel Thickness	35-68mm
Max Panel Height	3300mm
For doors between 35-47mm thick use an alternative to the standard flushbolt	



SECUREFOLD PRO 100 (NON-MORTICE)

**DRAWING IS
NOT TO SCALE**

