

# Y500 / 187 / 1 Key Access





## Opening the storage compartment

- Slide the cover down to reveal the dials.
- Turn the dials to the preset factory combination 0-0-0-0 and align the numbers with the guide line.
- Push the release button to open the door.


## Securing the storage compartment

- Close the compartment door and hold closed.
- Scramble the combination dials to lock the door.
- Slide the cover up.

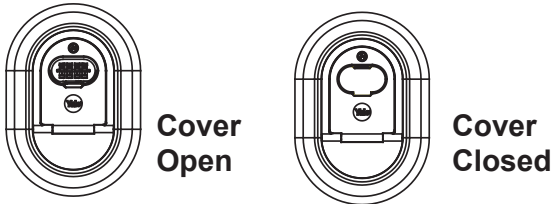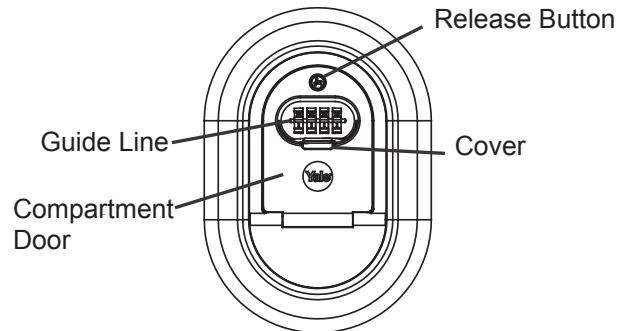

## To set a new combination

- Open the compartment door.
- Push the reset lever left and down and keep it in this position.
- Turn the dials to set your own combination.
- Push the reset lever up and into the original position.
- Close the compartment door and hold closed.
- Scramble the combination dials to lock the door and conceal your combination.
- Close the Cover.
- Your new combination is now set.


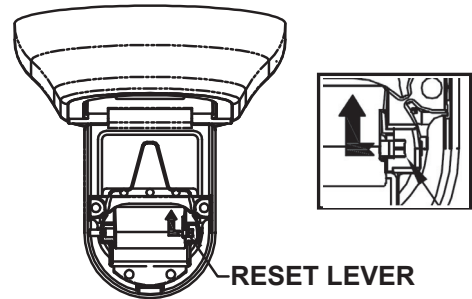


## To Fit onto a wall

### Tools Required:

**Pencil or marker, Phillips head screwdriver. Level, drill and drill bit. For masonry, anchors and a hammer are recommended.**

- Open the compartment door.
- Position the lock on the desired surface.
- Use level to check the lock is vertical.
- Using the product as a template, mark the position of the screws on the surface using pencil or marker.
- Remove the product.
- Using an appropriate size drill bit.
- Insert anchors using hammer if required.
- Position lock.
- Insert and tighten screws. Close the compartment door and hold closed. Scramble the combination dials to lock the door and conceal the combination.
- Close the cover.

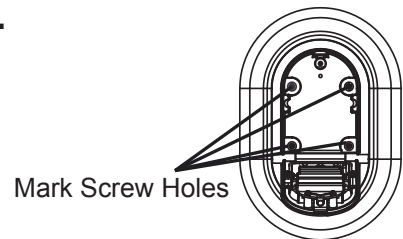

### Remember:

**The compartment door will remain open until you scramble the dials.**

**Keep the cover closed to increase weather resistance and to conceal the dials from view.**

Record your combination. Store it in a safe place  
— — — —

Issue No. 1