



We recommend the Sylvan ML7 Mortice latch for use with these handles.

- * It provides smooth, silent operation long, trouble-free life
- * Available in white or brown finish to blend with your door.
- * 70mm Extended Backset ensures that you do not bark your knuckles when opening the door!

- 1 Install latch accurately in door and push spindle through square hole in follower.
- 2 Push the fixing plate/centralisers onto the two ends of the spindle and bring them squarely against the door. The fact that the centraliser is a close fit on the spindle will ensure that the fixing plate is correctly positioned. Mark screw holes.

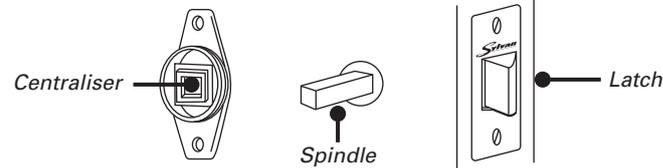

- 3 Drill screw holes. (3mm drill) and screw fixing plates to the door. Do not overtighten screws.

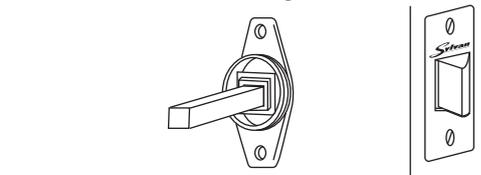


- 4 To remove centralisers, push door knob on one end of the spindle and turn. This will break centralisers free. Remove and discard centralisers.
- 5 Lightly screw door knobs to fixing plates. Ensure that latch is operating freely, then tighten base plates.

If your installation is on a bathroom, toilet or bedroom door, don't forget that you can secure privacy (with reassurance of emergency release) by also fitting the Sylvan Privacy Bolt - available with a knob finish to match your door handles.


We recommend the Sylvan ML7 Mortice latch for use with these handles.

- * It provides smooth, silent operation long, trouble-free life
- * Available in white or brown finish to blend with your door.
- * 70mm Extended Backset ensures that you do not bark your knuckles when opening the door!

- 1 Install latch accurately in door and push spindle through square hole in follower.
- 2 Push the fixing plate/centralisers onto the two ends of the spindle and bring them squarely against the door. The fact that the centraliser is a close fit on the spindle will ensure that the fixing plate is correctly positioned. Mark screw holes.

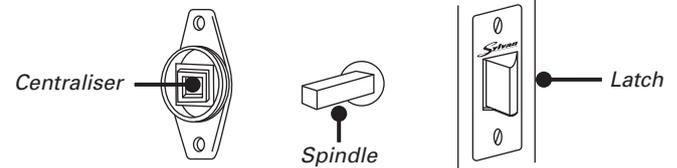

- 3 Drill screw holes. (3mm drill) and screw fixing plates to the door. Do not overtighten screws.

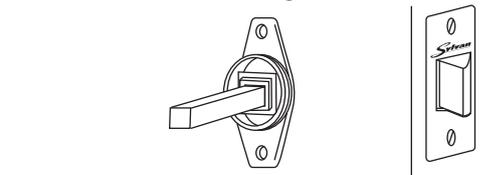


- 4 To remove centralisers, push door knob on one end of the spindle and turn. This will break centralisers free. Remove and discard centralisers.
- 5 Lightly screw door knobs to fixing plates. Ensure that latch is operating freely, then tighten base plates.

If your installation is on a bathroom, toilet or bedroom door, don't forget that you can secure privacy (with reassurance of emergency release) by also fitting the Sylvan Privacy Bolt - available with a knob finish to match your door handles.


We recommend the Sylvan ML7 Mortice latch for use with these handles.

- * It provides smooth, silent operation long, trouble-free life
- * Available in white or brown finish to blend with your door.
- * 70mm Extended Backset ensures that you do not bark your knuckles when opening the door!

- 1 Install latch accurately in door and push spindle through square hole in follower.
- 2 Push the fixing plate/centralisers onto the two ends of the spindle and bring them squarely against the door. The fact that the centraliser is a close fit on the spindle will ensure that the fixing plate is correctly positioned. Mark screw holes.

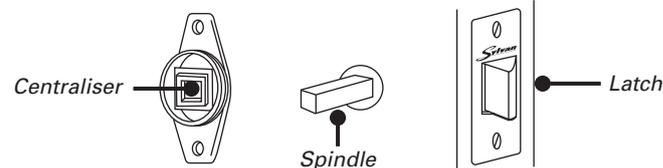

- 3 Drill screw holes. (3mm drill) and screw fixing plates to the door. Do not overtighten screws.

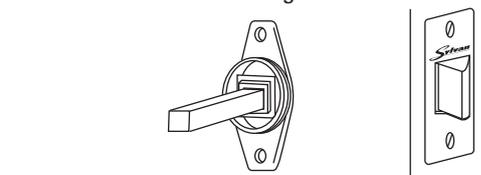


- 4 To remove centralisers, push door knob on one end of the spindle and turn. This will break centralisers free. Remove and discard centralisers.
- 5 Lightly screw door knobs to fixing plates. Ensure that latch is operating freely, then tighten base plates.

If your installation is on a bathroom, toilet or bedroom door, don't forget that you can secure privacy (with reassurance of emergency release) by also fitting the Sylvan Privacy Bolt - available with a knob finish to match your door handles.


We recommend the Sylvan ML7 Mortice latch for use with these handles.

- * It provides smooth, silent operation long, trouble-free life
- * Available in white or brown finish to blend with your door.
- * 70mm Extended Backset ensures that you do not bark your knuckles when opening the door!

- 1 Install latch accurately in door and push spindle through square hole in follower.
- 2 Push the fixing plate/centralisers onto the two ends of the spindle and bring them squarely against the door. The fact that the centraliser is a close fit on the spindle will ensure that the fixing plate is correctly positioned. Mark screw holes.

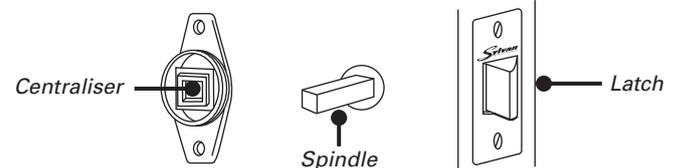

- 3 Drill screw holes. (3mm drill) and screw fixing plates to the door. Do not overtighten screws.

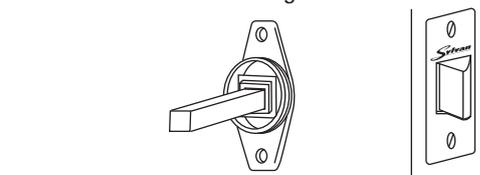

- 4 To remove centralisers, push door knob on one end of the spindle and turn. This will break centralisers free. Remove and discard centralisers.
- 5 Lightly screw door knobs to fixing plates. Ensure that latch is operating freely, then tighten base plates.

If your installation is on a bathroom, toilet or bedroom door, don't forget that you can secure privacy (with reassurance of emergency release) by also fitting the Sylvan Privacy Bolt - available with a knob finish to match your door handles.