

3024 Door Closer Series

A range of adjustable power door closer units suitable for architectural and commercial applications.

Standard Features

- 2 – 4 Power Adjustable;
- Hold Open;
- Adjustable Backcheck;
- Speed Controls;
- Overload Protection;
- Non-Handed;
- Regular, Parallel & Over Door mounting.

Hold Open

Hold open can be set at any angle up to 150° of opening.

Standard Finishes

Gold **GLD**
 Silver **SIL**
 Other finishes available on request.

FIRE RATED



Tested on fire door assemblies up to 4 hours in accordance with Australian Standard AS 1905.1-1997, Part 1: Fire-resistant doorsets



3024 Standard Arm

Closer installed on pull side of door. This mounting position permits opening of 180°.



Part Numbers	
Non hold open	3024
Hold Open	3024H

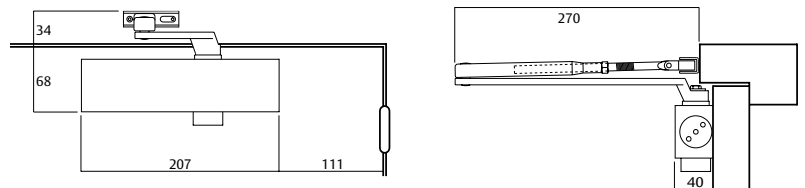

3024 Parallel Arm

Closer installed on push side of door. This mounting position permits opening of 180°.

Part Numbers	
Non hold open	3024
Hold Open	3024H

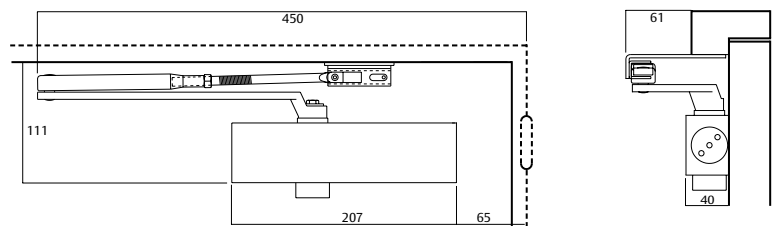

3024 Over Door Mounting

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 180°.

Part Numbers	
Non hold open	3024
Hold Open	3024H

